


## Appearance

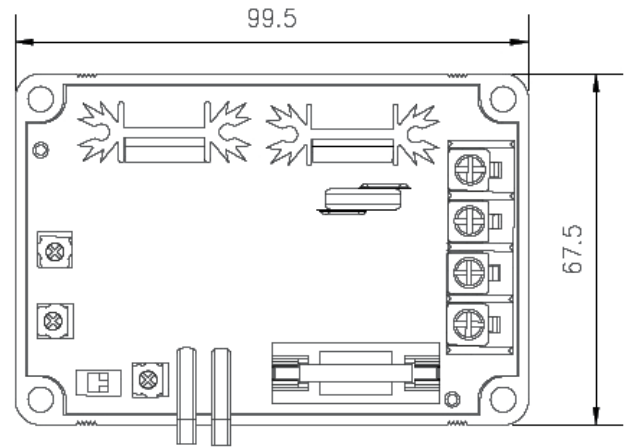

## Features

- Programmable Input Voltage
- Adjustable Output Voltage
- Low Frequency Protection
- Panel mount design for easy installation
- 5 Amps Capacity
- EMI Protection
- Low Power Consumption
- Compact size and light weight design

## Specifications

- Input phase voltage : 110 / 220 AC
- Power input voltage : 100 ~ 240VAC, 50/60 Hz
- Voltage adjustable range :  $\pm 7\%$  @ 1K $\Omega$  EXT.VR
- Minimum excitation voltage : 5VAC
- Power consumption : 8W (Max)
- Frequency : 50/60 Hz
- Magnetic field output : 5.2A (Max)
- Working temperature : 0°C~65°C
- Dimensions : 67.5 mm x 49 mm x 99.5 mm
- Weight : 106g

## Dimensions

